

# EPICUS

ELEGANT SURFACES

"CLASSIC ELEGANCE OF ELEMENTS"

600 x 1200 mm  
FULLBODY TILES







INTRODUCING  
**TERRAZZO**  
COLLECTION

Presenting to you a collection that embraces the classic eminence of the elegance of Terrazzo in a new timeless dominance of superior surfaces. The collection is ready to offer you ageless prominence paired with modern finesse and attributes.



# 600x1200mm

Matt & Glossy  
Finish





# Timeless elegance in the widest color palette

Explore the widest range of colors and ambiance to craft your spaces in the reflection of your personality through the versatile and vast range of fullbody tiles of the Terrazzo Collection.






# Advantages



# Applications Area



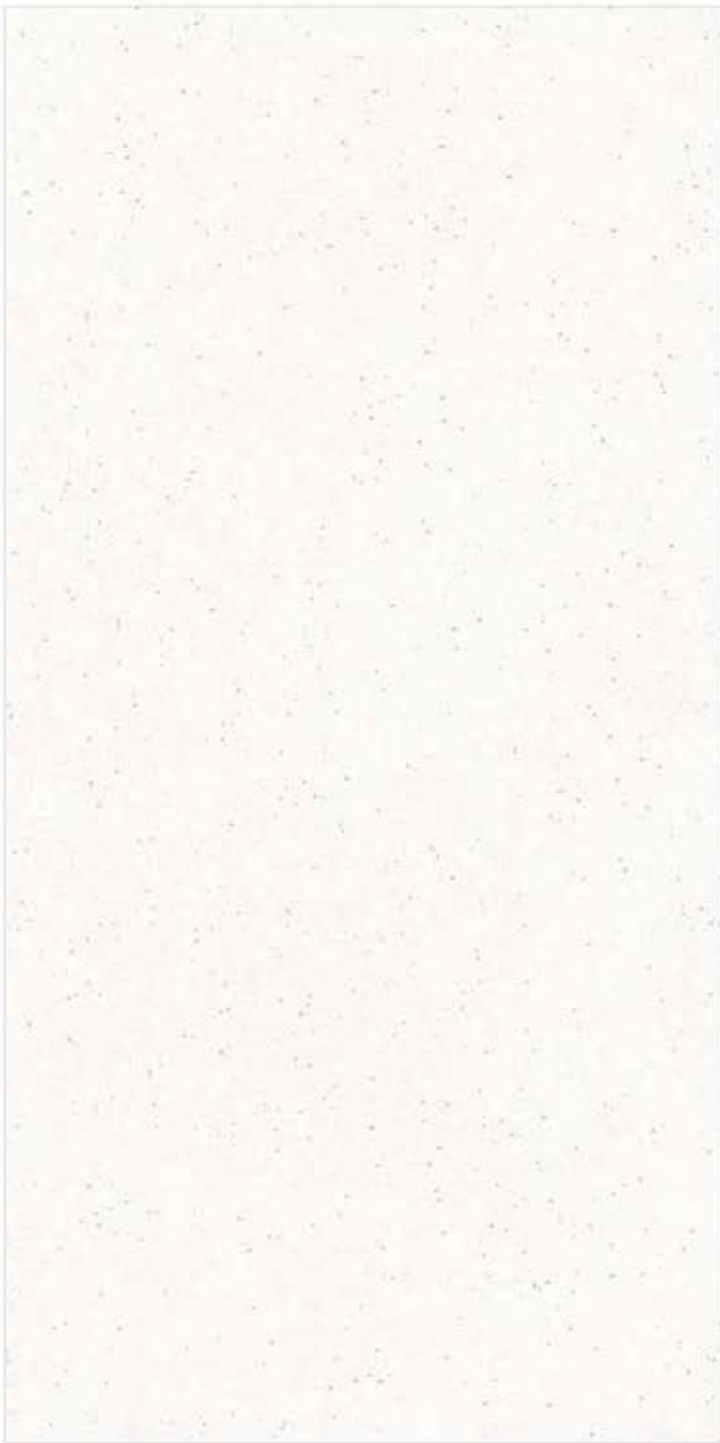

AVAILABLE IN  
**MATT & GLOSSY**

# TERRAZZO STAR WHITE

600x1200mm  
-



ZERO  
MAINTENANCE



IMPACT  
RESISTANCE



LOW WATER  
ABSORPTION



HIGH  
STRENGTH



AVAILABLE IN  
**MATT & GLOSSY**

# TERRAZZO PEARL

600x1200mm

-



ZERO  
MAINTENANCE



IMPACT  
RESISTANCE



LOW WATER  
ABSORPTION



HIGH  
STRENGTH





AVAILABLE IN  
**MATT & GLOSSY**

# TERRAZZO WALNUT

600x1200mm  
-



ZERO  
MAINTENANCE



IMPACT  
RESISTANCE



LOW WATER  
ABSORPTION



HIGH  
STRENGTH





AVAILABLE IN  
**MATT & GLOSSY**

# TERRAZZO FERN

600x1200mm

-



ZERO  
MAINTENANCE



IMPACT  
RESISTANCE



LOW WATER  
ABSORPTION



HIGH  
STRENGTH



AVAILABLE IN  
**MATT & GLOSSY**

# TERRAZZO STONE

600x1200mm



ZERO  
MAINTENANCE



IMPACT  
RESISTANCE



LOW WATER  
ABSORPTION



HIGH  
STRENGTH





AVAILABLE IN  
**MATT & GLOSSY**

# TERRAZZO NERO

600x1200mm

-



ZERO  
MAINTENANCE



IMPACT  
RESISTANCE



LOW WATER  
ABSORPTION



HIGH  
STRENGTH

## TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm <sup>3</sup>	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 <sup>-6</sup>	< 6 x 10 <sup>-6</sup>	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance(friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

## PACKING DETAILS

	Size	Pcs. / Box	Weight / Box (approx.)		Coverage Area / Box
			Polished	Matt	
	600x1200mm	2 pcs	29 kg	31 kg	15.5 ft <sup>2</sup> or 1.44 mtr <sup>2</sup>



EPICUS

E L E G E N T   S U R F A C E S